

07/12/00

JC685 U.S. PTO

OLD  
S. U. 5478/60  
6988-1

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney Docket No.

000871

Total Pages

First Named Inventor or Application Identifier

Masami KIDONO and Hideaki YOSHIDA

press Mail Label No.

Check Box, if applicable: ☐ Duplicate

APPLICATION ELEMENTS FOR:  
**IMAGE PICKUP APPARATUS**

ADDRESS TO: Director of Patents and Trademarks  
BOX PATENT APPLICATIONS  
Washington, D.C. 20231

1. ☒ Fee Transmittal Form (Incorporated within this form)  
(Submit an original and a duplicate for fee processing)

2. ☒ Specification Total Pages [30]

3. ☒ Drawing(s) (35 USC 113) Total Sheets [2]

☒ Oath or Declaration Total Pages [5]

a. ☒ Newly executed (original)

b. ☐ Copy from prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed).

i. ☐ Deletion of Inventor(s)

Signed statement attached deleting inventor(s) named in prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b).

☐ Incorporation by reference (useable if box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement Verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet and document(s))

9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)

☒ Power of Attorney

**UTILITY PATENT  
APPLICATION TRANSMITTAL**

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney Docket No.

000871

First Named Inventor or Application Identifier

Masami KIDONO and Hideaki YOSHIDA

PAGE 3 OF 3

[XX] A check in the amount of \$ 730.00 is enclosed to cover the filing fee of \$ 690.00 and the assignment recordation fee of \$ 40.00.

[ ] Please charge our Deposit Account No. **01-2340** in the total amount of \_\_\_\_\_ to cover the filing fee and the \_\_\_\_\_ assignment recordation fee. A duplicate of this sheet is attached.

[XX] The Commissioner is hereby authorized to charge payment for any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Deposit Account No. **01-2340**. A duplicate of this sheet is attached.

**18. CORRESPONDENCE ADDRESS**

ARMSTRONG, WESTERMAN, HATTORI  
McLELAND & NAUGHTON  
1725 K Street, N.W. Suite 1000  
Washington, D.C. 20006  
Telephone: (202) 659-2930  
Facsimile: (202) 887-0357

SUBMITTED BY

Typed or Printed Name William F. Westerman

Reg. No. 29,988

Signature

Date: July 12, 2000

WFW/ll

## Specification

Title of the Invention

IMAGE PICKUP APPARATUS

This application claims benefit of Japanese Application No. Hei 11-199750 filed in Japan on July 14, 1999, the contents of which are incorporated this reference.

Background of the Invention

The present invention relates to image pickup apparatus, and more particularly relates to an image pickup apparatus having a function for correcting false signals.

In conventional solid-state image pickup apparatus using CCD image pickup device, there is a problem of image quality deterioration due to smears which occur as a phenomenon peculiar to CCD image pickup device when an intense light has been incident thereupon. In particular, such phenomenon occurs as charge not captured at its true charge accumulating region is caused to leak into the vertical transfer line across the potential barrier. If caused by an ordinary and steady light, such phenomenon occurs over a vertical transfer period. In the case of a spot light, it results in a vertical stripe extended up and

down therefrom. Also, if the image object includes a horizontally extended bright portion such as a scenic view containing the sky, a flare-like whitish image over the frame as a whole is the outcome.

A method for example as disclosed in Japanese patent application laid open Hei-7-67038 has been known as the method for correcting such phenomenon. Noticing the fact that a smear occurs substantially at the same level along the vertical direction due to the principle of its occurrence, the output level of vertical OB (optical black) pixels, i.e., an optically concealed accumulating pixel region outside the effective pixel region, is determined as a smear eliminating reference signal which is subtracted from the pixel output signals of an effective frame.

Specifically, the smear eliminating reference signal as disclosed in the same laid-open application is defined as line information (mean value data corresponding to pixels of one line) obtained by means of addition as mean values (the respective mean of every 12 vertical pixels) of signals of vertical OB pixels consisting of a plurality of lines (12 lines in an embodiment thereof), so as to reduce the effect of randomized noise contained in such reference signal. Hence a consideration is made in order not to cause an additional fixed pattern noise to the contrary due to the smear correction.

Further, special drive methods are sometimes used in image pickup apparatus using CCD image pickup device. As a typical example of special drive, a description is given below with respect to a known "n-multiple rate vertically added drive (n-addition drive)" which is a high-speed, high-sensitivity readout drive. In this drive method, the number of pixels (transfer clock number) to be transferred to H (horizontal) transfer line from V (vertical) transfer line during each one H (horizontal) blanking period is set to a natural number  $n$  of two or more instead of the usual "1". The number of vertical lines corresponding to one frame is thereby set to  $1/n$ . As a result, the readout time of one frame becomes  $1/n$ , and the sensitivity is increased to be  $n$  times greater by charge addition at the time of transfer.

It should be noted that, as a further developed form of this drive method, "m/n-addition drive" for selectively transferring only specified  $m$  ( $\leq n$ ) lines out of  $n$  lines to be added at the time of transfer from the vertical transfer line to the horizontal transfer line (including "n-addition drive" as a special case, i.e., "n/n-addition drive" where  $m=n$ ) is also used in charge transfer to the V transfer line from the signal accumulating region of the pixels before V transfer, for the purpose of considering color coding pattern in a color image pickup device or of suitably adjusting the sensitivity. However, since these are

essentially identical as far as the explanation of the present invention is concerned, this specification will explain the case of  $m=n$ , i.e., the above described  $n$ -addition drive as the representative of these.

Since the smear correction method described above as a prior-art technique premises a normal drive, it cannot be applied to an image pickup apparatus for performing special drive such as the above described  $n$ -addition drive.

Specifically, suppose that subtraction and correction are made by obtaining a smear eliminating reference signal as "mean value data corresponding to pixels of one line" as disclosed in the above laid-open application. Since the smear component contained in the output signals of  $n$ -addition drive corresponds to " $n$ " lines due to addition at the time of transfer, the smear component corresponding to " $n-1$ " lines remains as a result without being eliminated. Further, if pixel defect occurs in the vertical OB pixels, such information is contained also in the smear eliminating reference signal. Hence there is another problem that additional fixed-pattern noise is newly caused to the contrary due to the correction.

#### Summary of the Invention

To solve the above described problems in the image pickup apparatus having the conventional smear correction



plurality of drive modes, the image pickup apparatus can be achieved as capable of favorable smear correction for each drive mode with reducing to a minimum such problems as occurrence of newly added noise due to the correction processing. The above object is thereby accomplished.

It is another object of the invention to provide an image pickup apparatus having as drive modes a normal mode and n-addition mode, capable of favorable smear correction with reducing to a minimum such problems as occurrence of newly added noise due to pixel defect.

In accordance with a second aspect of the invention, one of the plurality of drive modes of the image pickup apparatus according to the first aspect is a normal drive mode for severally reading out each pixel charge of the image pickup device and another is n-addition mode for reading out pixel charges of the image pickup device as vertically added for a predetermined number  $n$  ( $n$  being a whole number greater than 1).

By using such construction, it becomes possible to perform favorable smear correction for normal mode and for n-addition mode with reducing to a minimum such problems as occurrence of newly added noise due to pixel defect. In other words, a true smear correction can be performed even at the time of an addition mode for example by performing a level processing of correction reference signal



corresponding to the added number. The above object is thereby accomplished.

It is a further object of the invention to provide an image pickup apparatus in which a smear correction of high image quality can be performed without causing an occurrence of newly added noise due to pixel defect and at the same time with adequately suppressing the effect of randomized noise.

In accordance with a third aspect of the invention, the image pickup apparatus according to the second aspect, even in n-addition drive mode, exceptionally performs readout by the normal drive mode for severally reading out each pixel charge when reading out the vertical optical black pixel portion.

By using such construction, since, even in n-addition mode, readout by normal drive mode is exceptionally performed when reading out the vertical OB pixel signals, newly added noise due to pixel defect does not occur. Further it becomes possible to perform smear correction of high image quality with adequately suppressing the effect of randomized noise. The above object is thereby accomplished.

#### Brief Description of the Drawing

Fig.1 is a schematic block diagram showing the

000114725-071200

construction of digital camera as a whole of a first embodiment of the image pickup apparatus according to the invention.

Fig.2 schematically shows a sensor region of CCD image pickup device in the embodiment shown in Fig.1.

#### Description of the Preferred Embodiments

An embodiments of the present invention will now be described. Fig.1 is a block diagram showing a digital camera as a first embodiment of the image pickup apparatus according to the invention. Included are: 1, lens system; 2, lens drive mechanism; 3, exposure control mechanism; 4, filter system; 5, CCD image pickup device; 6, CCD driver; 7, preprocess circuit including an analog-to-digital converter; 8, digital process circuit including a memory as hardware, for performing all the digital processing. Also shown are: 9, memory card interface; 10, memory card; 11, LCD image display system; 12, system controller including a microcomputer as its main component; 13, operation switch system; 14, operation display system including an indicating LCD; 15, strobe; 16, lens driver; 17, exposure control driver; 18, EEPROM.

In thus constructed digital camera, all the control is generally performed by the system controller 12 which, in particular, controls a shutter device in the exposure

control mechanism 3 and drive of the CCD image pickup device 5 by the CCD driver 6 to perform exposure (charge accumulation) and readout of signals. These are stored to the digital process circuit 8 through the preprocess circuit 7 including an analog-to-digital converter. After subjected to all the necessary types of signal processing therein, these are then displayed on the LCD image display system 11 or recorded on the memory card 10.

The types of signal processing to be performed at the digital process circuit 8 include smear correction processing using output level information of the vertical OB pixels which is a main subject of the invention. In particular, the digital process circuit 8 includes: a correction reference signal generating section 8-1 for generating a smear eliminating reference signal on the basis of the output level of vertical OB pixels; and an image signal correcting section 8-2 for correcting (eliminating smears of) image signals in an effective pixel region by using the smear eliminating reference signal. Further, a normal drive and an optional n-addition drive are performed in readout of image pickup signals by suitably changing the pattern of drive clock of the CCD driver 6 as required.

Fig.2 schematically shows a sensor region of the CCD image pickup device 5. The sensor region is consisting of an effective pixel portion EP forming an imaging area

consisting of a pixel array disposed substantially at the center, and VOB and HOB which are OB (optical black pixel portion) for determining black reference respectively in the vertical and horizontal directions. In the present embodiment, such optical black pixel portion "OB" is consisting of VOB, i.e., a vertical OB forming a pixel array of 12 lines in the vertical direction above the effective pixel portion EP and HOB, i.e., a horizontal OB of 40 pixels horizontally on the right side of the effective pixel portion EP. These OB regions are constructed by covering a light-shielding film onto the sensor. Smears do exist also in such VOB as in the effective pixel portion EP. Usually, the imaging output signal obtained from VOB contains a smear signal at the same level as in the imaging output signal obtained from the effective pixel portion EP.

Further, dummy bits DB, i.e., additionally provided vertical transfer lines corresponding to 12 lines, are provided at a lower end portion of the vertical transfer lines of the CCD image pickup device 5 directly before a horizontal transfer line (horizontal shift register) 101. This portion is optically shielded in a similar manner as the horizontal transfer line 101 and OB region. Accordingly, smears do not occur at the time of DB transfer. Referring to Fig.2, numerals 102, 103 each represent an example of smear that occurs when correction

processing is not performed.

It should be noted that the digital camera according to the present embodiment performs a movie (consecutive imaging) operation corresponding to a composition defining electronic finder and a still (static image taking) operation which is the main image taking. In the case of movie, the exposure time is controlled only by a so-called device shutter which is based on control of charge accumulation at the image pickup image pickup device. In the case of still, too, an exposure time control solely depending on the device shutter is used if it is difficult to also use a mechanical shutter for example at the time of sequential photographing. At least in these cases, therefore, smears do occur as described in the above described prior art example if correction is not performed. For this reason, the smear correction processing is to be applied at least to such cases.

For ease and simplicity of explanation, the digital camera according to the present embodiment as will be described in the following does not have a mechanical shutter. All exposure time control is performed only by the device shutter including the case of taking a static image consisting of only one frame. In the case of movie operation of the digital camera according to the present embodiment, all the images respectively outputted at each

of the consecutive frames (or field in an interlaced scanning, hereinafter) are used for display. In the case of still operation, however, the image of only one frame or, for example in sequential photographing, of one frame per two frames at most is subject to recording (and display). When n-addition drive is used, image pickup device drive and operation processing for the correction of smears are performed differently between at the time of movie operation and at the time of still operation.

A description will now be given with respect to camera control by the system controller 12 with focusing on the processing directly related to smear correction in the digital camera according to the present embodiment. Address of fault pixels of the image pickup device 5 as previously determined by an inspection in its manufacturing process including that of those in OB region is stored in the EEPROM 18. The criterion of defect in the inspection, however, is different between that for the effective area and that for OB area. A stricter level condition is applied to that for OB area. Address information of fault pixels in the effective area is used in a known pixel defect compensation processing and description thereof will be omitted.

After storing the imaging output signals corresponding to one frame obtained as sequentially reading

09514725:071200

signal charges produced by an exposure in the above described respective operation to a predetermined memory region of the digital processing circuit 8, a smear eliminating reference signal is computed at the correction reference signal generating section 8-1 by using output of VOB, i.e., the vertical OB. Here, if without a pixel defect and in normal drive, the sum is calculated, as in the prior-art technique disclosed in the above cited laid-open application, of every 12 pixels having the same horizontal address (hereinafter: a pixel group consisting of such 12 pixels being referred to as "rod") of the data of OB pixels which constitute 12 lines. It is divided by the number of pixels, 12, to obtain a mean value. In other words, image signal of one line where each one pixel corresponds to the mean value of each rod is defined as the smear eliminating reference signal.

The smear correction processing by the image signal correcting section 8-2 in the present embodiment is characterized in that drive mode and pixel defect are also considered in such processing. The method of drive for this is also contrived to perform different processing between movie operation and still operation. The case of n-addition drive will now be described with respect to processing at the time of movie operation and that at the time of still operation.

[1] Processing at the time of movie operation:

The above described known n-addition drive is used as the drive method of the image pickup device uniformly for all the scan region including the OB region. Accordingly, both the pixels in OB region and the pixels in the effective region are respectively added for n, and the output pixel number (number of data units) at the time of readout of each rod is reduced to "12/n" (the quotient, a whole number, of 12 divided by n). At this time, depending on the value of n, etc., those outputted include a signal data where charges are added of pixels of VOB, i.e., vertical OB region and pixels of the effective region EP and a signal data where n pixel signals are not contained as it is positioned at an end. Those data as they are can be used neither as OB nor as effective output signal and become discard data which are not used as data.

Before obtaining the sum of each rod for correction of smears, then, the address of the fault pixels stored in the EEPROM 18 is looked up. If there is a fault pixel in the pertinent rod, it is determined whether or not there is an output signal data obtained as addition of n units only of faultless pixels without including fault pixels. If there is, the sum (or the value as it is if there is only one) of data consisting only of such faultless pixels is



obtained. It is then divided by "what is obtained by subtracting the number of data including fault pixels from  $[12/n]$  (the number of data in rod), i.e., the number of data consisting only of faultless pixels in the pertinent rod" to obtain a mean value corresponding to  $n$  pixels only of the faultless pixels of the pertinent rod. In other words, the smear eliminating reference signal is formed as image signals at the time of  $n$ -addition drive corresponding to one line of the values obtained as mean values of readout data without containing fault pixels in each rod. Accordingly, in correcting smears at this time: (1) correction is performed of accurate level corresponding to drive mode; and (2) the fault pixels in OB region have no effect thereupon.

On the other hand, if there are too many defects or if the value of  $n$  is large, it is possible that an  $n$ -added output signal data only of faultless pixels without including a fault pixel does not exist in respect of the pertinent rod. For example, since the number of output data of a rod becomes 1 in the case where  $n \geq 7 > \text{"pixel number in rod"}/2$ , the same as described above occurs if at least one is defective out of  $n$  pixels corresponding to the data.

In such a case, it is unavoidable, even if defect is contained, to obtain the sum of the data (or the value as it is if there is only one) by ignoring the defect. In this case, too, the effect of defect is relatively diluted

in the process of n addition and data summation operation, though the effect of the fault pixels cannot be totally eliminated.

In other words, although the case of imperfect processing occurs depending on the presence of pixel defects as the condition may be, it is also possible unlike the prior-art technique to correspond to n-addition drive and to correct smears with an improved performance. Even this is sufficiently advantageous, since the movie operation in a still camera is mainly used in a composition defining display, i.e., the so-called electronic view finder, etc.

[2] Processing at the time of still operation:

In this case, for the effective region EP, the above described known n-addition drive is used as the drive method of the image pickup device. For VOB, i.e., the vertical OB region, then, it is switched between normal drive and the n-addition drive for every other frame. A complete elimination is thereby achieved of the information of defect pixel which in some cases cannot be removed by the processing at the time of the above described movie drive.

In this case, a frame that is subject to recording, etc., is the frame of which the effective pixel region EP is read out directly after the performance of n-addition drive

with respect to VOB. Hereinafter this will be referred to as a first frame. In particular, suppose V transfer line as in its state directly before the readout onto the V transfer line by shift pulse of charges to be read out in such first frame. It is in an equivalent state as in the case of movie drive of the above described [1], since a certain type of n-addition drive has been performed for the duration of the drive of previous one frame. It is also similar when charges are shifted to read pixel charges corresponding to the effective region EP of the first frame so that data added by n-addition drive are outputted in a similar manner as in the movie drive. After the completion of such readout of the effective region EP, from the point in time at which pixel charge of VOB region is first transferred onto the horizontal transfer line, pixel signals are read out with switching to a normal drive where the transfer pixel number (vertical transfer clock number) in a H blanking period is "1". After the completion of such VOB readout, the processing is returned to the original n-addition drive again. Thereafter, in the case where consecutive images are additionally required, VOB of the next frame is read out with keeping the n-addition drive, VOB of the frame directly after the next with changed again to the normal drive, and so on.

At this time, in the state switched to the normal

09614725-071200

drive, since all the pixel charges of VOB region have already been transferred down to the dummy bits DB which is an optically shielded portion, smears do not occur after this point in time. Here, when the pixel charges of such VOB region are being transferred through the effective pixel region EP, exactly the same n-addition drive is used as at the time of transfer of charges of the effective pixel region EP which have been previously read out in the first frame. Hence the smear component occurring in the VOB output signal is exactly the same as that in the effective pixel region EP. Accordingly, in generation of the smear eliminating reference signal, it suffices to consider only that the data has not been subjected to n-addition. Specifically, it is achieved in the manner as follows.

First, before obtaining the sum of each rod, address data of fault pixels stored in the EEPROM 18 is looked up.

If there is a fault pixel in the pertinent rod, such pixels are excluded and the sum is obtained only of the remaining faultless pixels. After multiplied by "n", it is then divided by "what (the number of faultless pixels in the pertinent rod) is obtained by subtracting the number of fault pixels from 12 (the total number of pixels in the rod)". A mean value is thereby obtained as that corresponding to addition of n pixels only of the faultless

09614725.071200

pixels of the pertinent rod. In other words, the obtained smear eliminating signal is an image signal corresponding to one line, each pixel signal thereof having a value which is "n times the mean value only of faultless pixels in each rod". Accordingly, in correcting smears at this time: (1) correction is performed of suitable level corresponding to drive mode; and (2) the fault pixels in OB region have no effect thereupon.

In this case, unlike the correction at the time of movie drive of [1], since data of VOB is read out separately for each pixel, an elimination of one pixel defect does not sacrifice other faultless pixels. It is thus significantly characterized in that it is, in actuality, always possible to generate the smear eliminating reference signal only from data of faultless pixels even when the defect of pixels is relatively greater in quantity or when the number of addition "n" is large. Further, since the divisor is adjusted after removing data of fault pixels so as to correspond thereto, an equal ratio is kept for the weight of faultless pixels in respect of the pertinent rod of each OB line contained in the smear eliminating reference signal. Hence it is superior also in that the advantage of reducing the effect of randomized noise is not adversely affected. In this manner, it is possible to keep a highly favorable quality of the image to be recorded at the time

of still operation.

It should be noted that, when driven correspondingly to the still operation, normal drive (non-addition) readout of VOB is performed for one out of every two frames. Concerning the frame (hereinafter referred to as a second frame) of which the effective pixel region EP is read out directly after such normal drive readout of VOB, the image signal of the second frame during such VOB normal drive period is being transferred through the vertical transfer line within the effective pixel region EP. For and only for this period, it is transferred slower than it is in other periods with taking time that is  $n$  times greater. Hence, only those lines being just transferred in the vicinity of a bright object image at that time are to contain a smear component that is higher than, i.e.,  $n$  times greater than of the other lines. This becomes a new factor in deterioration of image quality. Accordingly, since the image of the second frame is not suitable for recording, only the image of the first frame is selectively used in recording a still photograph.

Thus obtained smear eliminating reference signal is used to correct smears concerning the effective pixel signals. In particular, an output after correction is obtained by subtracting the smear eliminating reference signal from each line data of the pixel signal read out

from the effective pixel portion EP. It is obvious that such subtraction is performed of pieces of data having the same horizontal address.

The image signal of the effective pixel region EP after the smear correction processing is furthermore subjected to pixel defect compensation by a known pixel defect compensation means. Such processing is rendered at the digital process circuit 8 on the basis of fault pixel address data stored in the EEPROM 8. There is a significance in performing smear correction first and then defect compensation. If the order is simply reversed, a smear phenomenon itself and/or deterioration of image quality due to smear correction are caused for example when information of a pixel having a horizontal address different from that of the fault pixel is used in interpolation thereof.

The image signal after processed of smear correction and compensation of pixel defect in the above described manner is suitably subjected to various signal processing and then displayed on the LCD image display system 11 or recorded on the memory card 10. The displayed or recorded image becomes a high quality image corrected of smears and hence without an apparent smear.

Various other embodiments are possible in addition to the above described first embodiment. In an example,

05614725:071200

the present invention is applied to a so-called movie camera (video movie) which is mainly used to take dynamic images.

Since the camera shown in the above first embodiment is the so-called digital still camera which is mainly used to take a static image, an attempt for solving the problem without depending on the present invention is also possible by also using an optical shutter such as mechanical shutter, at least if limited to taking of one frame of a static image. By contrast, since taking of dynamic images is the main in the case of a movie camera, there is a general requisite in design not to use an optical shutter including that for static image taking which is an additional function. Hence the advantage of the present invention is more conspicuous therein.

Further, when processing of [1] and processing of [2] in the above first embodiment are compared with each other, the processing of [1] in the case of performing  $n$ -addition drive, though can correspond to consecutive image output, has a disadvantage that a problem due to pixel defect remains to some extent. The processing of [2] on the other hand, though superior in image quality, is incapable of corresponding to movie operation, since the most favorable image can be obtained only in the first frame (or one frame out of two frames at most). It should be noted that, for the normal drive corresponding to  $n=1$ , both [1]



and [2] signify the same processing and do not have such problem as those pointed out above. By noticing this, some modifications are possible as in the following.

In a first modification, smear correction is not performed in the case of movie operation at the time of n-addition drive. In the first place, since V transfer in the case of n-addition drive is performed at a rate n times faster than that in the normal drive, the smear thereof is reduced  $1/n$  as compared to that at the time of normal drive. Accordingly, the first modification is an example of rather selecting one without correction than causing a possibility of new noise occurrence due to the processing of [1] considering the fact that the movie operation at the time of n-addition drive is nothing but to be used for display.

In a second modification, the processing of [2] is used also in the case of movie operation as in that of still. In this case, a smear of level higher than that of other lines as described above occurs at a portion of the image in the second frame. This, however, remains within a level substantially identical to the smear in the case of normal drive (the same before correction and  $(n-1)/n$  times after the correction). Also, in respect of regions, it occurs only in  $l_2$  lines (before addition or  $l_2/n$  lines after the added readout) which are equal to the number of lines

of VOB containing highly bright spot. Hence such method can be employed if the effect thereof is judged as allowable. A caution is required, however, that a flicker-like noise is caused in the case of movie operation, since the above described high level smear does not occur in the first frame.

In a third modification, while the processing of [2] is being used also in the case of movie operation as in still, the frame rate is compensated for by using a buffer memory. In particular, while a rate "n" times that in the case of normal drive is obtained in the conventional n-addition drive, a rate up to "n/2" times that in the case of normal drive can be obtained by using only the images of the first frames in the correction processing of [2]. By using these as movie mode images, it can be achieved at the same time of securing image quality. For example, if  $n=12$ , movie images can be obtained at a rate 6 times greater. It should be noted that an additional component is not required if the digital process circuit 8 itself is caused to serve as the buffer memory.

While, in the above described embodiment and modifications, images after smear correction are to be recorded, or be displayed for use in a monitor function (electronic view finder), they can be applied not only to these but also naturally to any optional purposes. Such

09644725-071200

applications include as specific examples their application: in automatic control of various signal processing as represented by Automatic Gain Control and Automatic White Balancing; and as information in various automatic control functions such as Automatic Exposure, Automatic Focusing and Automatic Image Stabilizer.

While some embodiments of the present invention and modifications thereof have been specifically described, the present invention is not limited to these and naturally can take any form within the scope as set forth in its claims.

As has been described by way of the above embodiments, it is possible in accordance with the present invention to achieve an image pickup apparatus in which a true smear correction is performed and deterioration of image quality can be prevented even in the case of performing a special drive for example where lines are added in readout of image pickup signals. Particularly, in accordance with its first aspect, since different types of correction reference signal generation processing are performed corresponding to a plurality of drive modes, favorable smear correction can be performed for each drive mode with reducing to a minimum such problems as occurrence of newly added noise due to the correction processing. In accordance with its second aspect, it becomes possible to perform favorable smear correction for the normal mode and

for n-addition mode with reducing to a minimum such problems as occurrence of newly added noise due to pixel defect. In accordance with its third aspect, since, even in n-addition mode, readout by normal drive mode is exceptionally performed when reading out the vertical OB pixel signals, newly added noise due to pixel defect does not occur and it becomes possible to perform smear correction of high image quality with adequately suppressing the effect of randomized noise.

WHAT IS CLAIMED IS:

1. An image pickup apparatus comprising:

an image pickup device;

correction reference signal generation means for generating a correction reference signal from output signals of a vertical optical black pixel portion of the image pickup device, for correcting effective image signals outputted as signal of an effective pixel portion of said image pickup device;

image signal correction means for subtracting said correction reference signal from said effective image signals; and

image pickup device drive means having a plurality of drive modes for driving said image pickup device to read pixel charge as an output signal;

wherein said correction reference signal generation means performing different types of correction reference signal generation processing in generating the reference signal, corresponding to the plurality of drive modes of said image pickup device drive means.

2. The image pickup apparatus according to claim 1, wherein one of said plurality of drive modes is a normal drive mode for severally reading out each pixel charge of

09614725-071200

said image pickup device and another is n-addition drive mode for reading out pixel charges of said image pickup device as vertically added for a predetermined number n (n being a whole number greater than 1).

3. The image pickup apparatus according to claim 2, wherein, even in said n-addition drive mode, readout is exceptionally performed by the normal drive mode for severally reading out each pixel charge when reading out said vertical optical black pixel portion.

4. An image pickup apparatus comprising:  
an image pickup device having an effective pixel region formed of a pixel array disposed substantially at the center of a light receiving portion and an optically shielded pixel region formed of a pixel array disposed adjacent to the effective pixel region and covered by a light-shielding member;

drive means for supplying to said image pickup device a plurality of drive clock pattern as drive signals corresponding to a plurality of readout modes and for respectively reading out signals of the effective pixel region and signals of the optically shielded pixel region of said image pickup device corresponding to said plurality of readout modes; and

correction means for subtracting a readout signal of said optically shielded pixel region from a readout signal of said effective pixel region of said image pickup device.

5. The image pickup apparatus according to claim 4, wherein said plurality of readout modes of said drive means comprise a first readout mode for severally reading all the pixels in the effective pixel region and a second readout mode for reading by adding vertically a string of pixels of a predetermined number greater than two in said effective pixel region.

6. The image pickup apparatus according to claim 4, wherein said plurality of readout modes of said drive means comprises a dynamic image taking mode and a still image taking mode.

7. The image pickup apparatus according to claim 4, wherein said optically shielded pixel region comprises a predetermined number of horizontal pixel rows.

Abstract of the Disclosure

An image pickup apparatus including: CCD image pickup device; a correction reference signal generating section for generating a correction reference signal for correcting effective image signals of the image pickup device from output signals of a vertical optical black pixel portion of the image pickup device; an image signal correcting section for subtracting the correction reference signal from an effective image signal; and CCD driver having a plurality of drive modes for driving the image pickup device to read pixel charges as output signals; wherein, when generating the reference signal, said correction reference signal generating section performs different types of reference signal generation processing corresponding to the plurality of drive modes of the CCD driver.

09614725-071200



FIG. 1


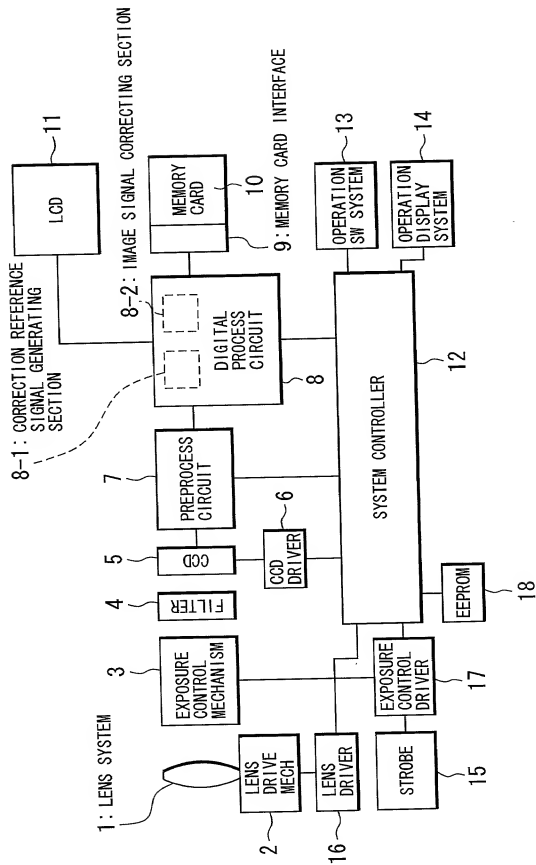


FIG. 2

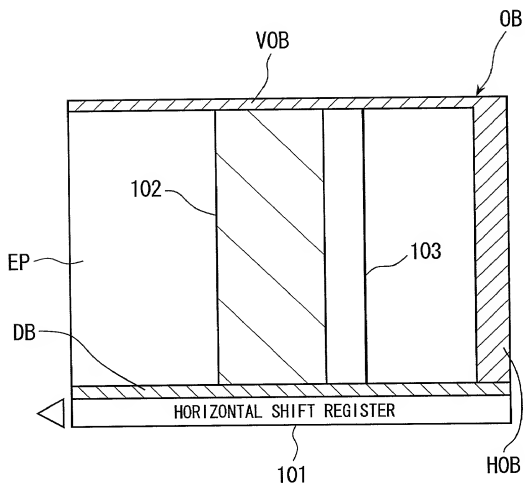

MG 00-02VS

# Declaration and Power of Attorney for U.S. Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

Image pickup apparatus

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ \_\_\_\_月\_\_\_\_日に提出され、米国出願または特許協定  
条約国際出願番号を\_\_\_\_とし、  
（該当する場合）\_\_\_\_に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

00614725-071200

## Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

## Prior Foreign Application(s)

外国での先行出願

11-199750

Japan

(Number)  
(番号)(Country)  
(国名)

14 July, 1999

(Day/Month/Year Filed)  
(出願年月日)

Priority Not Claimed

優先権主張なし

☐(Number)  
(番号)(Country)  
(国名)(Day/Month/Year Filed)  
(出願年月日)☐

私は、第35編米国法典119条(e)項に基づいて下記の特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)(Filing Date)  
(出願日)(Application No.)  
(出願番号)(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1.56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Application No.)  
(出願番号)(Filing Date)  
(出願日)(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)(Application No.)  
(出願番号)(Filing Date)  
(出願日)(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行う表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



第三共同発明者		Full name of third joint inventor, if any	
第三発明者の署名	日付	Third inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第四共同発明者		Full name of fourth joint inventor, if any	
第四発明者の署名	日付	Fourth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第五共同発明者		Full name of fifth joint inventor, if any	
第五発明者の署名	日付	Fifth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第六共同発明者		Full name of sixth joint inventor, if any	
第六発明者の署名	日付	Sixth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	

## List of attorneys and/or agents

James E. Armstrong, III, Reg. No. 18,366; William F. Westerman, Reg. No. 29,988; Ken-Ichi Hattori, Reg. No. 32,861; Le-Nhung McLeland, Reg. No. 31,541; Ronald F. Naughton, Reg. No. 24,616; William G. Kratz, Jr., Reg. No. 22,631; Mel R. Quintos, Reg. No. 31,898; Donald W. Hanson, Reg. No. 27,133; Stephen G. Adrian, Reg. No. 32,878; Scott M. Daniels, Reg. No. 32,562; James P. Welch, Reg. No. 17,379; John R. Pegan, Reg. No. 18,069; John F. Carney, Reg. No. 20,276; Edward F. Welsh, Reg. No. 22,455; William L. Brooks, Reg. No. 34,129; John P. Kong, Reg. No. 40,054; Luke A. Kilyk, Reg. No. 33,251. James E. Armstrong, IV, Reg. No. 42,266; Nicholas E. Seckel, Reg. No. P-44,373; Leonard D. Bowersox, Reg. No. 33,226; Raymond J. Ho, Reg. No. 41,838; Thomas E. Brown, Reg. P-44,450; and James N. Baker, Reg. No. 40,899.

Rev. 04/99

09614725-071200